

11/22/00

+

# UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No. 2664.4

First Named Inventor or Application Identifier

YATISH PATHAK, ET AL.

Express Mail Label No.

**APPLICATION ELEMENTS** See MPEP chapter 600 concerning  
utility patent application contents.

## ADDRESS TO:

Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☐ Applicant claims small entity status.  
See 37 CFR 1.27.

3. ☒ Specification Total Pages 28

4. ☒ Drawing(s) (35 USC 113) Total Sheets 4

5. ☒ Oath or Declaration Total Pages 2

a. ☒ Newly executed (original or copy)

b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)

i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

6. ☒ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer  
Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies); or

ii. ☐ paper

c. ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☒ Information Disclosure ☒ Copies of IDS  
Statement (IDS)/PTO-1449 Citations

13. ☐ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_\_  
Prior application information: Examiner Group/Art Unit:

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax

+

jc406 U.S. PTO  
09/11/241  
11/22/00

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	46	-20 =	26	X \$ 18.00 = \$468.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	3	-3 =	0	X \$ 0.00 = \$000.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$270.00 =	\$000.00
				BASIC FEE (37 CFR 1.16(a))	\$710.00
				Total of above Calculations = \$1,178.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,178.00

19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☐ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	RICHARD P. BAUER, REG. NO. 31,588
SIGNATURE	
DATE	November 22, 2000

#### INVENTOR INFORMATION

Inventor One Given Name:: YATISH  
Family Name:: PATHAK  
Postal Address Line One:: 329 Bryant Street  
Postal Address Line Two:: Suite 3C  
City:: San Francisco  
State or Province:: CA  
Country:: USA  
Postal or Zip Code:: 94107

Inventor Two Given Name:: MICHAEL  
Family Name:: STUMM  
Postal Address Line One:: 3 Belvale Avenue  
City:: Toronto  
State or Province:: Ontario  
Country:: Canada  
Postal or Zip Code:: M8X 2A6

Inventor Three Given Name:: WILLIAM M  
Family Name:: SNELGROVE  
Postal Address Line One:: 603 - 90 Sherbourne Street  
City:: Toronto  
State or Province:: Ontario  
Country:: Canada  
Postal or Zip Code:: M5A 2R1

#### CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514  
Fax:: (212) 218-2200

#### APPLICATION INFORMATION

Title Line One:: WIRELESS LOCAL LOOP  
  
Total Drawing Sheets:: 4  
Formal Drawings?: Yes

Application Type:: Utility  
Docket Number:: 2664.4  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 2,302,461  
Filing Date:: MARCH 27, 2000  
Country:: CANADA  
Priority Claimed:: Yes

## **WIRELESS LOCAL LOOP**

### **FIELD OF THE INVENTION**

The present invention relates to a system, apparatus and method of providing local loop telecommunications services, or the like, through a wireless media. More specifically, the present invention relates to providing such services for both data and voice in a manner which can provide good usage of available shared radio resources, which can include spectrum/bandwidth and transmission power levels and network resources.

### **BACKGROUND OF THE INVENTION**

Much interest has been expressed recently in providing local loop services via mediums other than public switched telephone network (PSTN) copper wire local loops. Local loop services, also referred to as 'last mile' services, are the connection between the subscriber location and a local office or other access point to the PSTN.

One alternative to conventional copper wire local loop infrastructures is wireless local loop (WLL) systems that connect subscribers to the PSTN using radio signals to exchange information, as a substitute for copper wiring, over all or part of the connection between the subscriber and the PSTN. WLL systems have been installed in various locations to date, primarily third world or developing nations where the cost to establish a copper wire infrastructure for local loop services is very high. In more industrialized locations such as North America, including locations where a copper wire infrastructure already exists, great interest in WLL also exists to provide competition in local access services.

Generally, WLL systems developed and/or proposed to date build upon techniques and technologies developed for cellular mobile voice systems, including analog cellular (AMPS) and GSM or CDMA (PCS) cellular systems. Such systems have proven to be very successful to date at providing mobile voice wireless communications and much development has been performed with respect to their technologies.

The present inventors have determined however, that while WLL systems based upon mobile cellular technologies can provide reasonable voice performance, they do not provide a cost effective range of services and/or radio resource efficiencies that will be desired for WLL systems which provide voice and data services.

U.S. Patent 6,075,784 to Frankel et al. teaches a remote data terminal which supports two or more telephone and/or data devices and which connects to a network via a digital

subscriber line (DSL) replacement for a conventional local loop. While the remote data terminal taught by Frankel does deal with sharing the DSL line between multiple devices/users at the subscriber end, as the DSL line is not shared with other subscribers/remote terminals, Frankel does not teach the management of data transmission and/or network resources between multiple  
5 subscriber units.

It is therefore desired to have a system, apparatus and method to provide local loop services via wireless communications which allows a range of services to be provided in an efficient manner.

## SUMMARY OF THE INVENTION

10 It is an object of the present invention to provide a novel system, apparatus and method of providing local loop services and the like via wireless communication which obviates or mitigates at least some of the above-identified disadvantages of the prior art.

According to a first aspect of the present invention, there is provided a wireless local loop system comprising:

- 15 a network utilization manager;
- at least one base station including an antenna, a radio, a modem and a communication system; and
- a plurality of subscriber stations, each including an antenna, a radio unit and modem to exchange information with said at least one base station, at least two subscriber communications ports and a subscriber utilization client operable with said network utilization manager to assign capacity in said system to at least one of said two subscriber communications ports to create a connection between said base station and said at least one subscriber communication port.

20 Preferably, the communication system comprises a switch and a router. Also preferably, both a required level of capacity and a desired level of capacity can be considered when establishing a connection, said network utilization manager assigning said desired level of capacity when available and appropriate and said required level of capacity when said required level is available and appropriate and said desired level of capacity is not.

25 Preferably, said base station includes at least two sectors and the antenna each sector is connected to is a directional antenna. Also preferably, at least one of said communication ports is a telephony port and another of said communication ports is a data port.

30 Preferably, said network utilization manager is operable to reduce and/or increase assigned capacity to a subscriber station as network conditions change.

According to another aspect of the present invention, there is provided a subscriber station for a wireless local loop, comprising:

a radio operably connected between a modem and an antenna;

a processor operably connected between said modem and at least two

communications ports, said processor communicating with a base station via said radio to manage at least the allocation of radio bandwidth for a connection between said base station and at least one of said two communications ports.

Preferably, at least one of the two communication ports is a telephony port and the other of the two communication ports is a data port. Also preferably, the subscriber station includes a wireless media port to communicate with appropriately enabled devices in the vicinity of the subscriber station. Preferably, the subscriber station includes means to determine the purpose for which a connection is desired, said means including means to examine the IP port to which the communication is addressed, the communication port of the subscriber station to which the connection is to be established and/or an explicit indication provided by the process or user desiring the connection.

According to yet another aspect of the present invention, there is provided a method of managing communications between at least one base station and a plurality of subscriber stations in a wireless local loop, said communication being accomplished over a radio bandwidth shared by said base station and each of said subscriber stations, said base station performing the steps of:

(i) receiving a request from a subscriber station to create a desired connection between said base station and said subscriber station, said request indicating the type of said desired connection;

(ii) reviewing each received request and information representing the present allocation of said radio bandwidth to said subscriber stations to determine whether to allocate additional bandwidth to said subscriber station making said request, said review considering the amount of bandwidth and/or network resources required for said indicated type of connection;

(iii) allocating bandwidth and/or network resources and establishing said connection to said subscriber station as determined when it is determined to be appropriate to do so;

(iv) updating said maintained information to reflect the usage of said allocated bandwidth and/or network resources by each said subscriber station and/or to reflect bandwidth which is no longer allocated to a subscriber station after a connection has terminated; and

(v) repeating steps (i) through (iv).

The present invention provides a wireless local loop system which manages radio bandwidth shared by a plurality of subscriber stations by considering the type of connections desired to be created with the subscriber stations and the radio bandwidth, and in some cases Quality of Service (QoS) parameters, such as maximum latency, data rates, etc., required for those connections. The subscriber stations include data and telephony ports and can include a subscriber utilization client (SUC) to assist in the management process. The SUC in each subscriber station communicates with a network utilization manager (NUM) to request network resources from the base station. The NUM considers the requirements, in bandwidth and/or QoS levels, for a desired connection and the utilization of the network resources in determining whether to establish the desired connection. The SUC can explicitly inform the NUM of the requirements for a connection, or the NUM can determine the requirements by reference to the type of requested connection, by previously agreed service levels defined for a subscriber station or by any other suitable method. Requirements can include both required and desired bandwidths and/or QoS levels and the NUM can allocate resources for the connection according to either level, or therebetween, as appropriate depending upon network utilization conditions and/or service commitments to subscribers and/or economic considerations, such as prioritizing resource allocation to subscribers who pay a premium for such a level of service. Further, the SUC and NUM can prioritize the establishment of connections on an appropriate basis, including the type of connection, the parties to the connection, the revenue potential of the connection and the port for the connection at the subscriber station.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

Figure 1 shows a schematic representation of a WLL system in accordance with the present invention;

Figure 2 shows a schematic representation of a subscriber station in the system of Figure 1;

Figure 3 shows a schematic representation of a multi-sector base station in the system of Figure 1; and

Figure 4 shows a schematic representation of a single sector base station in the system of Figure 1.



## DETAILED DESCRIPTION OF THE INVENTION

A wireless local loop (WLL) system in accordance with an embodiment of the present invention is indicated generally at 20 in Figure 1. System 20 includes a radio base station 24 which is preferably connected to voice and/or data telecommunications network (not shown), such as a land line-based switched telephone network and/or data network, by one or more backhauls 28. A backhaul 28 can be a T1, T3, E1, E3, OC3 or other suitable land line link, or can be a satellite or other radio or microwave channel link or any other link suitable for operation as a backhaul as will occur to those of skill in the art.

Base station 24 communicates with a plurality of subscriber stations 32 which are installed at subscriber premises. Depending upon the amount of radio resources (spectrum, transmission power, etc.) available, the multiple access technique employed (FDMA, TDMA, CDMA, etc.) and/or the configuration and requirements of the subscriber stations 32, it is contemplated that 'n' subscriber stations, where n is one hundred or more, can be serviced by a base station 24.

In the illustrated embodiment of the present invention, each subscriber station 32 provides telephony ports for two conventional telephones 36,40, a telephony port for a facsimile machine 44 and a data port for a digital networked device, such as a personal computer or information appliance 48. The telephony connection ports, which are described further below, can be standard RJ-11 connectors or any other suitable connector/port as will occur to those of skill in the art. The data port can be an RJ-45 Ethernet port, or any other suitable connector/port for interfacing to digital network-enabled devices as will occur to those of skill in the art. As will be apparent to those of skill in the art, other types and/or combinations of ports can be provided as desired. For example, it is contemplated that in some circumstances a radio, compatible with the emerging 'Bluetooth' or IEEE 802.11 standards will be included in some subscriber stations 32 as a wireless media port 49 (for subscriber station 32b) to allow wireless communications between subscriber stations 32 and appropriately enabled devices in their vicinity. It is also contemplated that wireless media ports 49 providing communication via Infrared or other wireless media to appropriately enabled devices can be provided.

Communications channels 52 are established between base station 24 and each subscriber station 32. Channels 52 allow data (voice data representing digitized voice conversations or "pure" data representing email, html documents, streaming video, etc.) to be transferred between base station 24 and respective subscriber stations 32, preferably in packets, as

needed. The implementation/type of packet communication employed is not particularly limited, and can include IP (with TCP or UDP) and/or modifications thereof or any other packet implementation as will occur to those of skill in the art.

The radio resources for channels 52 is shared between base station 24 and all subscriber stations 32 in the reception footprint of that base station 24 or, in the case of a multi-sector base station 24 described below, in the reception footprint of the corresponding sector of a base station 24. Channels 52 can be formed on the shared bandwidth via any suitable multiple access technique, such as CDMA, OFDM, TDMA or FDMA, as will be apparent to those of skill in the art and/or by packetization of the information to be sent between base station 24 and subscriber stations 32. As used herein, the term radio resources comprises all of the factors which limit the sharing of a radio channel by multiple subscriber stations. Radio resources include the amount of spectrum allocated for use by system 20, which can be shared under multiple access techniques as frequency bands, time slots, channels coded with Walsh or Gold codes or the like, and can also include the amount of power used to transmit a radio signal, which is typically limited by the license to the radio spectrum and/or by resulting interference (in CDMA or similar multiple access systems).

As is known, a base station can operate with multiple sectors, defined by directional antennas, each sector comprising a different reception footprint and this allows reuse of available radio spectrum between sectors. By using antennas with 60° broadcast angles, six sectors can be employed at a base station. Similarly, by using antennas with 180° broadcast angles, two sectors can be employed at a base station, or antennas with different broadcast angles can be combined as desired to form sectors of different angles. Base stations 24 with a variety of numbers of sectors, as needed for a distribution and/or number of subscribers, are contemplated herein.

While it is generally assumed that the amount of radio resources within any reception footprint is fixed and yields a given data transmission capacity, the available data transmission capacity can vary between downstream (base station 24 to subscriber station 32) and upstream (subscriber station 32 to base station 24) directions. In CDMA multiple access-based methods, interference between signals from multiple users broadcasting upstream can reduce the aggregate upstream data rates from the higher data rates that can be obtained in the downstream direction, and the reduced power levels employed for users to transmit upstream generally limits the upstream peak data rates in all multiple access methods.

The available data transmission capacity can be allocated as desired, in either

direction, to various channels 52. Thus, for example, at one time period system 20 can provide a significant proportion of the total upstream data capacity to channel 52a and almost no upstream data capacity to channels 52b through 52n, to meet a high data transmission requirement of subscriber station 32a, while equally dividing downstream data capacity between all channels 52.

At a subsequent time, when the specific need of subscriber station 32a has been addressed, system 20 can allocate upstream and downstream data capacity between channels 52a through 52n on a more equal, or other, basis.

Figure 2 shows an embodiment of a subscriber station 32 in more detail. Subscriber station 32 includes at least one antenna 100 and a radio unit 104. As used herein, the term antenna is intended to comprise both single antennas and antenna assemblies, as will be apparent to those of skill in the art.

Subscriber station 32 also includes the above-mentioned telephony connection ports, identified in this Figure as ports 108a, 108b and 108c, for connecting conventional telephones and/or data devices which modulate data in the voice band (such as facsimile machines), respectively, and a data port 112. Each of telephony ports 108 is connected to a subscriber line interface circuit (SLIC) 116, such as an Am79R79 Ringing SLIC manufactured by AMD of One AMD Place, Sunnyvale, CA, or any other suitable SLIC which provides necessary signaling, voltage levels and other electrical requirements for such telephony connections. Data port 112 is connected to an Ethernet network interface controller (NIC) 120 or other suitable NIC as will occur to those of skill in the art. Each of SLICs 116 and NIC 120 are connected to a processor 124, such as the StrongARM microprocessor manufactured by Intel.

Processor 124 is also connected to a modulator/demodulator (modem) unit 128 which is constructed for use in radio systems, and modem 128 serves as an interface to radio unit 104. Modem 128 operates to: synchronize with transmitted signals; model radio propagation; select channels; and implement error-correcting codes and automatic repeat request and to generally implement suitable multiple access techniques (TDMA, FDMA, CDMA, OFDM, etc.) to establish communications channels 52 with one or more base stations 24.

In a present embodiment, radio unit 104 and modem 128 employ a wideband code-division multiple access technology, similar to that specified by the Third Generation Partnership Project (3GPP). Wideband CDMA is presently preferred as the inventors believe it can increase the aggregate capacity of available bandwidth by exploiting the relatively stable fixed-access situation of a WLL. However, while CDMA technologies are presently preferred, it is also contemplated

that technologies employing FDMA, TDMA, OFDM or other multiple access techniques, or combinations thereof, can also be employed if desired.

Processor 124 can also be connected to one or more digital signal processors (DSP) 132, such as a DSP from the AD 2100 family, manufactured by Analog Devices, Inc. of One Technology Way, Norwood MA, USA. DSPs 132 assist in performing signal processing tasks, such as encryption, channel decoding, filtering, etc. While it is presently preferred that at least one DSP 132 be provided in subscriber stations 32, it is contemplated that this is not essential and that, especially as microprocessors available for use as processor 124 continue to advance in their capabilities and/or decrease in cost, processor 124 can perform all needed functions in some circumstances.

Processor 124 performs a variety of functions, in conjunction with DSP 132 (if present), including implementing suitable voice coders, filters, encoders, data compressors and/or decompressors, packet assembly/disassembly, etc. for each port 108 and port 112. Presently, one or more codecs (not shown), such as the AD73322 codec manufactured by Analog Devices, Inc. are employed with processor 124 for A/D and D/A conversion, performing band limiting and A-law dynamic range compression on voice connections. It is contemplated however, that these codecs can be eliminated, depending upon whether DSP 132 is present and/or the capabilities of DSP 132 and/or processor 124, although suitable D/A and A/D conversion and other related functions will still have to be provided either separately or as an onboard function of processor 124 or DSP 132 (if present).

Processing functions are applied to the ports as appropriate. For example, if port 108c is identified to users as a facsimile-only connection, no voice compression coding will be performed on data received from that port. Similarly, no voice coding will be performed on data port 112, but data compression or other compression techniques can be performed on data received at this port and/or from a dedicated facsimile port such as 108c.

Alternatively, each of telephony ports 108 can employ suitable techniques for determining the type of equipment connected to them. For example, ports 108 can employ the known technique of monitoring a connection for the 2100 Hz tone which is transmitted by modems (such as those used in facsimile machines) when a connection is established. Upon detection of this tone, voice compression coding can be discontinued for the port and/or the connection characteristics altered accordingly, as described below.

If a wireless media port 49 is provided, data received at or transmitted from such a

port is also processed accordingly.

In this manner, voice information to and from telephony ports 108 is converted to and from digital form and data from data port 112 and ports 108 is processed and packets assembled for transmission by subscriber station 32, as required. Similarly, processor 124 will  
5 operate on packets received at subscriber station 32 from a base station 24 and will disassemble the received packets, process them as appropriate and supply them to the appropriate port or ports 108, 112 or 49.

Processor 124, modem 128 and radio 104 handle all connections between subscriber station 32 and base station 24. Thus, if sufficient radio resources are available (as  
10 discussed below) each port 108 and port 112 can have a simultaneous connection to base station 24 and each of these connections can have different characteristics such as QoS levels and/or data rates.

Figure 3 shows a base station 24 in more detail. As illustrated, base station 24 includes two sectors and has a first antenna 200a for the first sector and a second antenna 200b for the second sector. Again, as used herein the term antenna is intended to comprise an antenna or antenna assembly. When a base station 24 includes multiple sectors, antennas 200 are directional  
15 antennas. When a base station 24 includes only a single sector, as described below with reference to Figure 4, antenna 200 can be a directional or an omni-directional antenna as desired. It is also contemplated that an omni-directional antenna can be provided in addition to one or more  
20 directional antennas, with base station 24 multicasting (i.e. – broadcasting the same signal to all subscriber stations) through the omni-directional antenna and non-multicast signals being provided to individual subscriber stations through the direction antennas.

Each antenna 200a, 200b is connected to a respective radio unit 204a, 204b which is connected in turn to a respective modem 208a, 208b. Modems 208a, 208b are connected to a  
25 processor 212, such as a SPARC microprocessor system manufactured by SUN Microsystems. In a present embodiment of the invention, processor 212 is a single processor system for single sector base stations, but it is contemplated that systems with processors 212 comprising multiple microprocessors, such as a system including two SPARC microprocessors, can be employed if  
30 required in single sector base stations and that multi-sector base stations will likely include at least a single microprocessor processor 212 for each sector.

In the embodiment illustrated in Figure 3, base station 24 is shown, for clarity, with only two sectors but it is contemplated that in many circumstances base station 24 will include as

many as six or more sectors to increase the number of subscribers which can be serviced from a single geographic location of a base station 24. If base station 24 has more than a single sector, an antenna 200 will be provided for each sector, as will a radio unit 204 and a modem 208. In the illustrated embodiment, each sector is provided with a processor 212a, 212b. Employing multi-sector base stations is well known in the prior art and will not be discussed further herein.

In the illustrated embodiment, processors 212a and 212b are connected to a communication system including router 214 and switch 215. Switch 215 can switch packets between subscriber stations 32 served by base station 24. Router 214 routes data packets, irrespective of whether they represent voice or data information, onto backhaul 28 which connects base station 24 to a PSTN gateway 216, to connect to a telecommunications network such as a public switched telephone network (not shown), and/or to a packet switched data network 220, such as the Internet. Depending upon the amount of data traffic to be transferred between base station 24 and gateway 216 and/or network 220, backhaul 28 can comprise one or more T1, T3, E1, E3, OC3, microwave, satellite or other suitable telecommunication links as will occur to those of skill in the art.

Having switch 215 and router 214 located within base stations 24 can provide a number of advantages, including aggregation of packets for transmission through backhaul 28 and a convenient interface to backhauls 28 implemented in different standards. Switch 215 allows switching of calls between sectors of a multi-sector base station 24, or within a single sector, without requiring transmission of data for such connections over backhaul 28. It is however contemplated that switching of such intra-sector or intra-base station calls can be performed after consultation with a network utilization manager, discussed below, located outside of base station 24 and which is communicated with via backhaul 28. In addition, switch 215 and router 214 will permit base station 24 to perform some traffic management.

Figure 4 shows another embodiment of a base station 24 which includes a single sector, and thus a single radio 204 and modem 208. In this embodiment, base station 24 is intended to serve a reduced number of users, such as when deployed to fill in "shadowed" areas in system wherein users cannot reliably communicate with another, larger, base station 24 due to local conditions (intervening buildings, geography, etc.) or to serve as a base station 24 for a specific group of users who are logically and/or closely located geographically, such as for a group of business or residential users inside a single building. In the embodiment of Figure 4, gateway 216 is implemented within base station 24 and each of router 214 and gateway 216 can be connected to

a suitable backhaul or backhauls 28. In the embodiment of Figure 4, switch 215 performs intra-sector switching of packets.

It is contemplated that in some uses, the communication system of a base station 24 can include only a switch 215 or only a router 214. For example, while the embodiments of Figures 3 and 4 both show backhauls to connect to other networks, such as PSTN or packet networks, it is contemplated that in some circumstances such backhauls 28 will not be required. In such cases, for example, base station 24 can act solely as a standalone network, allowing only communications between the subscriber stations 32 which it services and in such cases only switch 215 need be provided. In another example, in Figure 3 it may be decided to omit switch 215 as sufficient capacity exists on back haul 28 to permit switching to be done at the same location as gateway 216 and improved network monitoring can be achieved.

In known wireless local loop systems, and cellular radio systems, data transmission capacity and resource management is accomplished by performing call admission control. Essentially, at the time a request is received to establish a connection, either from a subscriber or to a subscriber, a determination is made at the base station as to whether sufficient bandwidth is available for the connection with the subscriber port. If the base station determines that sufficient bandwidth is available, the connection is established. If the base station determines that sufficient bandwidth is not available, the connection is refused and the party trying to establish the connection is sent a 'busy' signal which indicates that they should retry their connection at a later time.

These prior art determinations of available bandwidth are made with a generic connection model that assumes that all connections have the same priority and require voice quality connections. For example, a voice connection or a facsimile connection are arbitrarily deemed to have the same priority and to require the same amount of bandwidth with the same Quality of Service (QoS) requirements for low jitter, latency, etc. that are appropriate for standard voice telephony connections. More recently, wireless systems have included means to provide data connections, although these too are deemed to have a single priority and/or bandwidth and QoS requirements.

Thus, in the prior art, radio bandwidth and resource management is performed only by call admission control and this control is performed at a very coarse level which does not necessarily provide for effective bandwidth and resource usage. For example, one or more connections can be established which have a low priority but which block a subsequent high priority call (for example a call to emergency services at 911). Also, one or more connections to a

user can require less bandwidth than has been assigned to them, and subsequent connections to the same or other users can be refused as the required bandwidth has already been allocated, even though the bandwidth is not in use.

So that confidence can be obtained that subscribers are sufficiently served, networks employing such call admission management schemes are typically significantly over-provisioned to ensure sufficient service will be available. Over-provisioning ratios such as three to one for voice networks, for example, can greatly add to the cost of deploying and running such networks.

The terms radio resources and network resources are used somewhat interchangeably herein with respect to system 20. As will be apparent to those of skill in the art, network resources can comprise processing capacity (coding, decoding, encrypting, decrypting, routing, switching, etc.) and other necessary functions, in addition to radio resources. While radio resources may be available for a connection, it will be apparent to those of skill in the art that other limitations, such as the examples of network resources given above, can limit the ability of system 20 to meet agreed data rates and/or QoS levels.

In contrast, in system 20 radio resources and/or network resources are actively managed to achieve fine granularity in usage. Also, as described below, in the present invention this management can be performed both when establishing a connection and also after a connection is established. With the present invention, radio resource management does not employ a generic connection model and instead considers the specific data transmission capacity and/or QoS requirements for a desired new connection and the existing connections in determining whether the new connection can be made. With this management scheme differentiated levels and/or types of service can be offered and a finer level of granularity in radio resource and network resource use can be achieved, providing for more efficient usage of the system resources and capabilities while providing high levels of customer (subscriber) service.

Specifically, processor 124 in each subscriber station 32 implements a subscriber utilization client (SUC) 136 which communicates with a network utilization manager (NUM) 224 at base station 24. In the simplest case, SUC 136 can merely operate to request NUM 224 to establish a connection. For example, SUC 136 will inform NUM 224 that a voice connection is desired and NUM 224 will determine an appropriate set of parameters required for the connection to the subscriber station and determine whether to allocate network and radio resources to establish the connection. In other cases SUC 136 can inform NUM 224 of required parameters for a connection and/or negotiate with NUM 224 to establish the connection. These cases are described



below, along with the operation of NUM 224.

While described hereinafter for clarity as being located at base station 24, NUM 224 can be implemented in a variety of manners and it is presently preferred that at least some of the functionality of NUM 224 be implemented in a distributed manner throughout system 20. System 20 can also include one or more network utilization management centers (not shown) which provide additional computing power and centralized control for NUM 224. However, no matter where or how NUM 224 is implemented, each base station will have access to a NUM 224, which is either running locally at the base station 24, or via an appropriate interface or proxy when all or part of NUM 224 is implemented elsewhere, to access the management functions described below.

SUC 136 and NUM 224 communicate and consider a variety of factors in making data transmission capacity availability and allocation decisions. The SUC 136 in each subscriber station 32 communicates with a NUM 224 which considers the needs and defined or desired service level for the subscriber station 32. NUM 224 maintains statistics reflecting the current usage of radio and network resources of the subscriber stations 32 in a sector, along with service levels agreed with those subscriber stations 32.

When a connection is to be made between base station 24 and subscriber station 32, NUM 224 determines if sufficient radio and/or network resources can be assigned in the appropriate sector and establishes the connection if the resources are available. NUM 224 updates its current usage statistics accordingly, in view of the actual resources utilized by the connection.

When NUM 224 wishes to establish a connection to a subscriber station 32, it determines the necessary resource requirements for the connection. When subscriber station 32 wishes to initiate a connection, it contacts base station 24 to forward a request to NUM 224. In either case, NUM 224 is informed of or determines the type of connection desired and NUM 224 considers the actual resources the proposed connection requires or desires.

For example, a connection for a conventional telephone (voice) call made via a packet-based network must meet certain data rates, QoS criteria, etc., including having available the computational resources to implement a G.728 voice coder/decoder at each end of the connection, having a data transmission rate of at least 16 kilobits per second and having an overall latency of no more than 60 milliseconds. The operator of system 20 can specify that the connection cannot be made at levels below these levels. However, as is known, a voice conversation can tolerate an occasional dropped packet.

Other types of connections, such as a data connection, can be established with data

rates and/or QoS levels that would be insufficient for a voice call. For example, a data connection may be virtually immune to latency (able to handle several hundreds of milliseconds or more) and require a moderate data rate, yet be sufficiently bursty that higher data rates can be required on an intermittent basis, and the dropping of packets can be unacceptable.

5           The communication from SUC 136 to NUM 224 can merely identify the type of desired connection (e.g. – voice, web browser, etc.), and NUM 224 can determine specific parameters for that type of connection from a lookup table, or other suitable mechanism, or SUC 136 can include specific requirements, such as data transmission capacity and QoS levels specified by a user, the system operator, or other specification means.

10           The method for determining the requirements for a particular connection are not particularly limited and any suitable manner, as would now be apparent to those of skill in the art, can be employed. In one embodiment of the present invention, requirements for voice telephony calls are input into subscriber station 32 by the operator of system 20 when the subscriber station 32 is set up to operate with network 20 and/or at any subsequent time as determined by the operator.

15           In another embodiment, these requirements are maintained in NUM 224 by the operator. It is also contemplated that these requirements can be changed, depending upon options selected and paid for by a subscriber, allowing voice calls of different qualities to be selected by a user on a general, or call by call basis. For example a G.729A voice coder can be specified which only requires a data rate of 8 kbps but provides a lower quality voice signal than a G.728 voice coder which requires a data rate of 16 kbps but which provides a somewhat better voice quality.

20           Requirements for connections through data port 112 can also be defined in a number of manners, as desired. For example, data port 112 can be configured to provide a selected maximum data rate with fixed QoS parameters. In a present embodiment of the invention, connection requirements are determined in a variety of manners, to allow for better granularity in data transmission capacity and resources usage. For example, for Internet Protocol (IP) communications, SUC 136 will consider, or will inform NUM 224, the IP port which is being addressed in a connection to assign requirements for the connection. For example, IP packets addressed to port 80 can be assumed to be packets for an http session and the connection requirements can be set to those appropriate for a web browser session (better downstream data transmission capacity than upstream, accept reasonably high latencies, etc.). Similarly, packets addressed to port 25 can be assumed to be packets for an email session and the connection requirements can be set to those appropriate for an email (low data rate required, high latencies

tolerated, etc.). It is also contemplated that other mechanisms, such as the class and priority bits in IPv6 or explicit information from an application communicating with data port 112 can be used to defined appropriate requirements for the connection.

It is also contemplated that traffic shaping can be applied to one or more ports 108 or 112. For example, a voice connection on a telephony port 108 which exceeds an agreed data rate requirement can be downgraded to comply with that requirement by employing a "leaky bucket" packet filter. This could occur, for example, where a user starts including background music in their voice connections, thus exceeding the approximate 50% duty cycle assumed for voice-only connections. If the user has only contracted for a normal voice grade set of connection requirements, the leaky bucket can mark packets which exceed the agreed requirements as being eligible for deletion and, if radio and/or network resources are not available, or if another reason exists to not increase the allocation of resources to increase the connection, these packets will not be transmitted over the connection.

It is also contemplated that a "token bucket" packet filter could be employed for traffic shaping in a similar manner. Token buckets operate to provide a fixed maximum number of packets in a fixed time period and allocate tokens to packets to be transmitted within that time. Packets which do not have a token assigned, are marked as being eligible for deletion.

For connections initiated at a subscriber station 32, SUC 136 communicates the type and/or requirements of a desired connection to NUM 224 which can then determine if resources can be allocated to make the desired connection. If SUC 136 is informed by NUM 224 that desired resources are available, the connection is established and NUM 224 updates its utilization statistics.

The requirements associated with a connection type can be changed, if appropriate, at NUM 224 to deal with changing services, network conditions, customer expectations, etc. For example, the operator of system 20 can reduce the resource requirements for voice calls on a holiday, by specifying a lower quality/lower rate voice coder, to accommodate an anticipated increase in the expected number of voice calls carried by system 20 during the holiday. After the holiday, the previous resource requirements which are appropriate to normal system conditions can be re-established.

A channel 52 of at least some minimal data rate is preferably maintained between a subscriber station 32 and base station 24 at all times that the subscriber station 32 is operational. This allows SUC 136 and NUM 224 to communicate to set up a connection and allows for various network and subscriber management functions to be implemented. Thus, in establishing a

connection, an existing channel 52 is allocated sufficient additional data transmission capacity and/or other resources for the connection. Once communication through the connection is complete, the connection is closed and the data transmission capacity and/or other resource allocation to channel 52 is reduced accordingly and can be re-used elsewhere in a sector. If a connection is already established via channel 52 and an additional connection is agreed between SUC 136 and NUM 224, sufficient additional data transmission capacity and/or resources are allocated to channel 52. Again, when either connection is completed, the data transmission capacity and/or resources allocated to channel 52 are reduced by an appropriate corresponding amount.

Similarly, QoS characteristics can be allocated to a channel 52 or taken into consideration when allocating data transmission capacity and/or resources to a channel 52. For example, packets sent via a channel 52 can be given a priority over other packets received at or sent from base station 24 to ensure that latency or other QoS criteria are met. Also, higher levels of forward error correcting (FEC) codes can be employed by subscriber station 32 and base station 24, and the necessary higher data rates allocated, to ensure a desired maximum frame error rate is not exceeded.

In circumstances wherein a level of data transmission capacity or QoS for a connection is merely desired and is unavailable, the connection can be created in a degraded state. In such a case, for example if data transmission capacity or other QoS criteria (such as latency or frame error rates) cannot be met for a desired connection, NUM 224 will establish a degraded connection if permitted by the service level agreed with subscriber station 32. If the degraded connection is permitted, the connection will be established by allocating the data transmission capacity and/or QoS parameters to channel 52 to effect the degraded connection. If additional data transmission capacity or network resources subsequently become available, the connection can be upgraded by NUM 224 allocating additional data transmission capacity or network resources. For example, a facsimile transmission normally has a baud rate of 9600 but can be degraded to a lower baud rate, such as 4800, where the lower baud rate has been selected to fit within the available data transmission capacity.

When NUM 224 receives a request from a third party to establish a connection with a subscriber station 32 and the available resources are not available, but a degraded connection could be established, NUM 224 can suggest a degraded connection to the third party if the third party supports consideration of such an option.

The establishment and/or operation of connections can also be prioritized at subscriber station 32, base station 24 or in general throughout system 20 as desired. In one embodiment SUC 136 includes a prioritization table, or other suitable mechanism as will occur to those of skill in the art, to define connection priorities. For example, a small home office using a facsimile machine and two voice telephone lines connected to a subscriber station 32 can be configured such that if a voice and a facsimile connection are desired at the same time and sufficient network resources exist for only one connection, priority to establish a connection is given to the voice connection. Thus, depending upon the amount of management performed at SUC 136 versus NUM 224, a request from SUC 136 for a connection can include augmented information indicating the type of connection required, i.e. – a “gold” level voice connection rather than a “bronze” level voice connection which NUM 224 can associate with data transmission capacity, computational resources (voice coders, etc.) and/or QoS criteria, or can include specific requested data rates and/or QoS criteria.

Such prioritization schemes can generally be as complex as desired. For example, in the previous example of a small home office, if a voice call is already established and it is desired to add both a second voice and a facsimile connection and if sufficient data rate and/or resources are not available to establish both, then SUC 136 and NUM 224 can be configured to prioritize either requested connection, as desired. Of course, such prioritization schemes can also be defined based upon particular connection parameters, such as the identity of the called party or the calling party, etc. For example, calls to emergency services, such as 911, can be given the highest connection establishment priority throughout system 20.

The prioritization for establishing connections can be defined by a subscriber and/or by the operator of system 20, although it is presently contemplated that the latter will be more prevalent. In fact, it is contemplated that such prioritization schemes can be changed by the operator of system 20 as desired, by transferring new prioritization schemes to subscriber stations 32 via channels 52 and/or by reconfiguring NUM 224. In this manner, prioritization schemes can be changed to adapt to network usage conditions, different billing parameters, etc. Further, such prioritization schemes can be implemented by the operator of system 20 as between subscribers and/or connections. For example, a particular subscriber station 32 can have been assigned a higher priority in NUM 224 than another subscriber station 32 in a sector, or in system 20, and will be given preferential access to resources. Also, as mentioned above, the present invention also permits differentiated levels of services and connections. For example, standard telephone connections in a

cellular telephone system are typically processed by voice codecs to require a data rate of about 8 kilobits per second (kbps). While this provides reasonable quality for many purposes, better quality voice connections can be provided by system 20. For example, levels of connections providing a quality equivalent to CD Audio quality and/or stereophonic voice connections (i.e. – the “gold” connection referred to above) can be offered. Similarly, different levels (256 kilobits per second, 1 megabit per second, etc.) of data rate connections can be offered at network port 112.

Further, such ‘levels’ need not be defined in terms of data rate, but can be defined by QoS criteria or combinations of data rate and QoS criteria. For example, a data connection for browsing on the world wide web could be defined as guaranteeing an effective rate of ½ megabits per second, but also being able to tolerate a total latency of up to three hundred milliseconds while a videophone connection could be defined as guaranteeing a rate of ½ megabits per second but being able to tolerate a maximum total latency of no more than twenty milliseconds. In each circumstance, SUC 136 advises the type of connection required to NUM 224 which considers the required data rate and QoS criteria to then appropriately determine if the connection can be established.

As mentioned above, services and connections can also be defined with desired levels of connection and minimum levels of connection and wherein these levels are allowed to change even after a connection is established. For example, the above-mentioned connection for browsing on the world wide web can be defined as desiring ½ megabits per second and latency not in excess of three hundred milliseconds, but having a minimum requirement of ¼ megabits per second and maximum latency of up to one second. If, when the request to establish the connection is first made, NUM 224 determines that sufficient data transmission capacity is available to meet the desired connection levels, then the connection is established for those criteria. If the subscriber station 32 subsequently requires additional data transmission capacity for another service, or if NUM 224 requires network resources for another connection, system 20 can degrade the web browser connection as required, down to the minimum rate and/or maximum latency criteria defined for that connection, to free up data transmission capacity and resources to meet the requirements for the new connection. Conversely, if the connection was established with less than the desired maximum criteria due to a limitation of resources when the connection was first established and additional resources subsequently become available, the connection can be upgraded to the desired maximum data transmission capacity level, or an intermediate level, if appropriate. Of course, system 20 can relate different costs to such different levels of services, as

desired and this is another factor which can be used by SUC 136 and NUM 224 to prioritize connections (i.e. – to improve or maximize revenues).

This also allows an operator to offer additional capacity in a time-limited manner, when appropriate. Specifically, if the operator has data transmission capacity which is not being used at a particular time, an offer can be made to a subscriber station 32 to employ that data transmission capacity for an existing connection, if desired. For example, a connection for web browsing can have a pop up window overlaid on it by subscriber station 32 offering the user a button which can be selected with the GUI to get an additional amount of data transmission capacity, for a fixed period of time for a fixed cost, e.g. – “Press Below to Double Your Data Transmission Rate for the Next 30 Seconds for 5 Cents” which can be used to download a file, etc. In other cases other consideration can be employed. For example, an offer to double the data transmission capacity for an agreed period of time can require the user to agree to the downloading of an advertisement to the user, before the additional data transmission capacity is made available.

In another example, a connection can be established for an http (web browsing) session, determined by port 80 being addressed, with an agreed set of connection parameters that are appropriate for such a connection. However, when the user of that http session wishes to download a file via ftp (again as determined by the port addressed) SUC 136 and NUM 224 can increase the data transmission capacity and/or network resources allocated to the connection to a level appropriate to an http session and an ftp session. Once the ftp download is complete, SUC 136 and NUM 224 deallocate the resources and/or data transmission capacity from the connection to return the total allocated to that agreed for the http session.

Further, as the amount of available data transmission capacity to and from base station 24 is not necessarily symmetric (as discussed above, generally more data transmission capacity exists downstream than upstream), NUM 224 can consider separately the upstream and downstream data transmission requirements of a connection when deciding to allow the connection. For example, if a facsimile is being transmitted to a subscriber station 32, relatively large amounts of data must be transmitted downstream to subscriber station 24 while only relatively small amounts of data (consisting essentially of acknowledgements) must be sent upstream from the subscriber station 32 to the base station 24. Accordingly, NUM 224 can accept a connection to receive a facsimile at a subscriber station 32 requiring a given amount of available data transmission capacity and yet refuse to establish a connection to transmit a facsimile from a subscriber station 32 to a base station 24 requiring the same given amount of data transmission

5

The above-described embodiments of the invention are intended to be examples of the present invention and alterations and modifications may be effected thereto, by those of skill in the art, without departing from the scope of the invention which is defined solely by the claims appended hereto.



We claim:

1. A wireless local loop system comprising:  
a network utilization manager;  
at least one base station including an antenna, a radio, a modem and a communication system; and  
a plurality of subscriber stations, each including an antenna, a radio unit and modem to exchange information with said at least one base station, at least two subscriber communications ports and a subscriber utilization client operable with said network utilization manager to assign capacity in said system to at least one of said two subscriber communications ports to create a desired connection between said base station and said at least one subscriber communication port.
2. The wireless local loop system as claimed in claim 1 wherein each said subscriber station requests said network utilization manager to establish a connection to said at least one subscriber communication port, said network utilization manager determining a required data rate for said connection from said request.
3. The wireless local loop system as claimed in claim 2 wherein said network utilization manager determines both a required data rate and a desired data rate from said request.
4. The wireless local loop system as claimed in claim 2 wherein said network utilization manager further determines at least one QoS level required for said connection.
5. The wireless local loop system as claimed in claim 2 wherein said network utilization manager further determines both at least one QoS level required for said connection and at least one QoS level desired for said connection from said request.
6. The wireless local loop system as claimed in claim 3 wherein monetary charges associated with said connection differ according to whether said connection is established at said required data rate or said desired data rate.
7. The wireless local loop system as claimed in claim 5 wherein monetary charges associated

with said connection differ according to whether said connection is established at said at least one required QoS level or said at least one desired QoS level desired for said connection.

8. The wireless local loop system as claimed in claim 1, wherein said base station is connected to a public switched telephone network via a PSTN gateway.

9. The wireless local loop system as claimed in claim 8 wherein said base station is connected to said PSTN gateway via a backhaul connection.

10. The wireless local loop system as claimed in claim 1, wherein said switch and router in said base station is connected to a packet network via a backhaul connection.

11. The wireless local loop system as claimed in claim 1 wherein at least one of said at least two subscriber communications ports is a data communication port.

12. The wireless local loop system as claimed in claim 11, wherein data communication port is an Ethernet port.

13. The wireless local loop system as claimed in claim 11, wherein said data communication port is a radio port for communication with radio-enabled devices adjacent said subscriber station.

14. The wireless local loop system of claim 11 comprising at least two telephony ports in addition to said data port.

15. The wireless local loop system of claim 14 wherein one of said at least two telephony ports is a data port for data modulated in the voice band.

16. The wireless local loop system as claimed in claim 1 including a prioritization table for at least one of said plurality of subscriber stations, and at least one of said subscriber utilization client in said subscriber station and said network utilization manager employing said prioritization table when assigning capacity to said at least one subscriber communications port in said at least one subscriber station.

17. The wireless local loop system as claimed in claim 16, wherein information in said priority table is downloaded to said subscriber station from said base station.

18. The wireless local loop system as claimed in claim 1 wherein said switch and router is operable to establish connections between subscriber stations serviced by the same base station.

19. The wireless local loop system as claimed in claim 1 wherein said base station comprises at least two sectors, each sector including an antenna, a radio, a modem and wherein said antenna is directional to define a reception footprint for each respective sector substantially different from the reception footprint of each other sector, each sector communicating with said router and wherein said network utilization manager manages and assigns resources on a per sector basis.

20. The wireless local loop system as claimed in claim 1 including at least two base stations and wherein said network utilization manager is implemented in a distributed manner on at least two of said at least two base stations.

21. The wireless local loop system as claimed in claim 10 and further including at least one network management center connected to said at least one base station via said backhaul, said network utilization manager being implemented in a distributed manner on said network management center and said at least one base station.

22. The wireless local loop system as claimed in claim 1 wherein said communication system comprises a router.

23. The wireless local loop system as claimed in claim 22 wherein said communication system further comprises a switch.

24. A subscriber station for a wireless local loop, comprising:  
a radio operably connected between a modem and an antenna;  
a processor operably connected between said modem and at least two communications ports, said processor communicating with a base station via said radio to manage at least the

allocation of data transmission capacity for a connection between said base station and at least one of said two communications ports.

25. The subscriber station as claimed in claim 24 wherein at least one of said two communications ports is a telephony port and at least another of said at least two ports is a data port.

26. The subscriber station as claimed in claim 24 wherein said processor communicates data transmission capacity requirements for a desired connection from either of said communication ports to said base station which evaluates said requirements before authorizing said connection.

27. The subscriber station as claimed in claim 26 wherein said processor also communicates at least one quality of service requirement for said desired connection to said base station which evaluates said data transmission capacity and quality of service requirements before authorizing said connection.

28. The subscriber station as claimed in one of claims 26 and 27 wherein said requirements are communicated by communicating the type of connection desired.

29. The subscriber station as claimed in claim 26 wherein said processor communicates to said base station data transmission capacity requirements and a higher level of desired level of data transmission capacity requirements for said desired connection and said base station determines which level of data transmission capacity requirements at which to authorize establishment of said connection.

30. The subscriber station as claimed in claim 29 wherein after said connection has been authorized at said desired level of data transmission capacity requirements, said subscriber station receives instruction from said base station to decrease the data transmission capacity authorized for said connection to a level below said desired level but at least equal to said required level.

31. The subscriber station as claimed in claim 24 wherein said processor further prioritizes the authorization of connections by said base station.

32. The subscriber station as claimed in claim 26 wherein said prioritization is based upon which of said at least two communication ports said connection is being authorized for.

33. The subscriber station as claimed in claim 24 wherein data transmission capacity and quality of service requirements for a connection are determined by said subscriber station based upon the type of connection to be established.

34. The subscriber station as claimed in claim 33 wherein said determination includes distinguishing between a desired voice connection and a desired data connection.

35. The subscriber station as claimed in claim 34 where for desired data connections, said determination further includes determining the type of data of said desired data connection.

36. The subscriber station as claimed in claim 35 wherein said type of data is determined by examining the internet protocol port to which said data is addressed.

37. A method of managing communications between at least one base station and a plurality of subscriber stations in a wireless local loop, said communication being accomplished over a radio channel shared by said base station and each of said subscriber stations, said base station performing the steps of:

(i) receiving a request from a subscriber station to create a desired connection between said base station and said subscriber station, said request indicating the type of said desired connection;

(ii) reviewing each received request and information representing the present allocation of said radio data transmission capacity to said subscriber stations to determine whether to allocate additional data transmission capacity to said subscriber station making said request, said review considering the amount of data transmission capacity and/or network resources required for said indicated type of connection;

(iii) allocating data transmission capacity and/or network resources and establishing said connection to said subscriber station as determined when it is determined to be appropriate to do so;

(iv) updating said maintained information to reflect the usage of said allocated data transmission capacity and/or network resources by each said subscriber station and/or to reflect data

transmission capacity which is no longer allocated to a subscriber station after a connection has terminated; and

(v) repeating steps (i) through (iv).

38. The method as claimed in claim 37 where in step (i) said desired type of connection is explicitly indicated.

39. The method as claimed in claim 37 where in step (i) said desired type of connection is determined by said base station.

40. The method as claimed in claim 39 where said determination is made in accordance with a predefined level of service for said subscriber station.

41. The method as claimed in claim 37 where in step (ii), said review further considers at least one Quality of Service parameter for said indicated type of connection.

42. The method of claim 37 wherein said subscriber station implements a prioritization of requests it makes for connections when it is desired to create at least a second connection.

43. The method of claim 37 where in step (ii) said review considers both the amount of data transmission capacity required for said indicated type of connection and an amount of data transmission capacity desired for said indicated type of connection and in step (iii) said desired amount of data transmission capacity is allocated to establish said connection to said subscriber station when it is determined to be appropriate to do so.

44. The method of claim 43 where an amount of data transmission capacity between said required and desired levels is allocated to said desired connection.

45. The method of claim 43 wherein if additional radio data transmission capacity is required by said base station after a connection is allocated a desired amount of radio data transmission capacity, said connection can have a proportion of the radio data transmission capacity allocated to it deallocated to obtain a reduced radio data transmission capacity utilization for said connection

while said connection is in progress, said reduced radio data transmission capacity not being less than said required radio data transmission capacity.

46. The subscriber station as claimed in claim 23 wherein said subscriber station distinguishes between voice communications and facsimile or data communications at said telephony port.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
221


**ABSTRACT**

A wireless local loop system manages radio data transmission capacity and network resources shared by a plurality of subscriber stations by considering the type of connections desired to be created to the subscriber stations and the radio data transmission capacity, and in some cases QoS parameters, and network resources required for those connections. The subscriber stations include data and telephony ports and can include a subscriber utilization client (SUC) to assist in the management process. The SUC in each subscriber station communicates with a network utilization manager (NUM) to request network resources from the base station. The NUM determines the requirements, in data transmission capacity and/or QoS levels, for the desired connection and considers the utilization of the network resources at the base station, or sector of the base station, in determining whether to establish the desired connection. The NUM can consider the required level and a desired level of data transmission capacity and/or QoS levels and allocate resources for the connection according to either level, or therebetween. The SUC and NUM can prioritize the establishment of connections on an appropriate basis, including the type of connection, the parties to the connection, the revenue potential of the connection and the port for the connection at the subscriber station, etc.








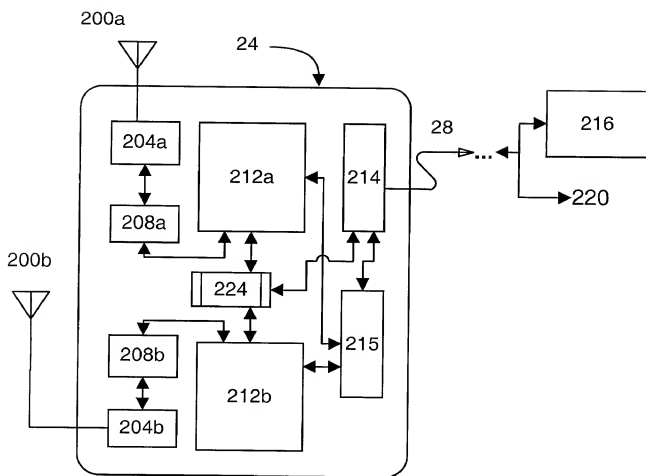

**Fig. 3**

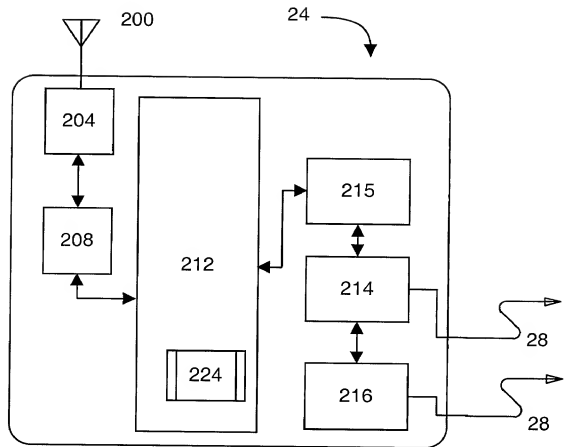

**Fig. 4**

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 1)

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled \_\_\_\_\_

**WIRELESS LOCAL LOOP**

☒ the specification of which is attached hereto

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b), of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country  
Canada

Application No.  
2,302,461

Filed (Day/Mo./Yr.)  
March 27, 2000

(Yes/No)  
Priority Claimed  
Yes

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.

Filed (Day/Mo./Yr.)

Status (Patented, Pending, Abandoned)

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Yatish Pathak

Inventor's signature [Signature]

Date 3/28/00 Citizen/Subject of United States of America

Residence 678 SOUTH GARLAND TERRACE  
SUNNYVALE, CA 94086

Post Office Address 329 Bryant Street, Suite 3C, San Francisco, CA 94107

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 2)

Full Name of Second Inventor Michael Stumm

Inventor's signature X Michael Stumm

Date X March 27, 2000

Citizen/Subject of Canada

Residence 3 Belvale Avenue, Toronto, Ontario, Canada, M8X 2A6

Post Office Address same as above

Full Name of Third Inventor William M. Snelgrove

Inventor's signature X William M. Snelgrove

Date X 2800 March 27

Citizen/Subject of Canada

Residence 603 - 90 Sherbourne Street, Toronto, Ontario, Canada M5A 2R1

Post Office Address same as above